

ERT SERIES

ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS



Performance

• Platform Height—Elevated			
ERT2669	26'2"	8 m	
ERT3369	32'8"	10 m	
ERT4069	40'3"	12.3 m	
ERT4769	47'	14.3 m	
• Platform Height - Lowered			
ERT2669	4'3"	1.3 m	
ERT3369	4'9"	1.5 m	
ERT4069	4'10"	1.5 m	
ERT4769	5'4"	1.6 m	
• Platform Capacity (Single Extension)			
ERT2669	1,500 lb	680 kg	
ERT3369	1,000 lb	453.59 kg	
ERT4069	800 lb	363 kg	
ERT4769	800 lb	363 kg	
- Capacity on Deck Extension	300 lb	136 kg	
• No. Occupants (Indoor/Outdoor)			
ERT2669	4/4		
ERT3369	4/2		
ERT4069	3/2		
ERT4769	3/2		
• Lift/Lower Time			
ERT2669	36/28 seconds		
ERT3369	42/33 seconds		
ERT4069	69/46 seconds		
ERT4769	81/55 seconds		
• Maximum Drive Height			Full Height
• Weight (single extension w/out leveling jacks) *			
ERT2669	8,627 lb	3,913 kg	
ERT3369	9,427 lb	4,276 kg	
ERT4069	10,560 lb	4,790 kg	
ERT4769	13,636 lb	6,194 kg	
• Drive Speed—Lowered	3.5 mph	5.6 km/h	
• Drive Speed—Elevated	0.5 mph	0.8 km/h	
• Gradeability			
ERT2669	40%		
ERT3369	40%		
ERT4069	35%		
ERT4769	30%		
• Turning Radius (Inside)	83"	2.1 m	
• Turning Radius (Outside)	175"	4.44 m	

* Certain options or country standards will increase weight.
** ERT4769 Includes a Push-Button Manual Descent System

Preliminary version



Standard Features

- 42 in/1.06 m Roll-out Deck Extension
- Moveable, Removable Platform
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Gate
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent Pull Cable **
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tires
- 220V-AC Receptacle In Platform
- 23 Amp Automatic, SCR Battery Charger
- 8 x 6V, 225 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 310 Amp-Hour Batteries (ERT4069)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4769)
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- 2WD AC Drive System
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness
- 2WD Drive

Standard Specifications

• Drive	AC Electric Drive
• Tire size (non-marking)	26 x 12 Foam Filled
• Hydraulic Reservoir	13.2 gal (50L)

Accessories & Options


- Hydraulic Leveling Jacks (Auto Level)
- 26 x 12 Foam Filled Lug Tread Tires
- 8 x 6V, 310 Amp-Hour Batteries (ERT2669, ERT3369)
- 8 x 6V, 375 Amp-Hour Batteries (ERT4069)
- Flashing Amber Beacon - LED
- Dual Flashing Amber Beacons - LED
- White Noise Backup Alarm
- JLG CleanGuard
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- Generator Set (Kubota Stage V OC60-E4) 6hp (4.5kW)
- Heavy Duty Pipe Racks

ERT SERIES

ENGINE POWERED ROUGH TERRAIN SCISSOR LIFTS

Dimensions

All dimensions are approximate.

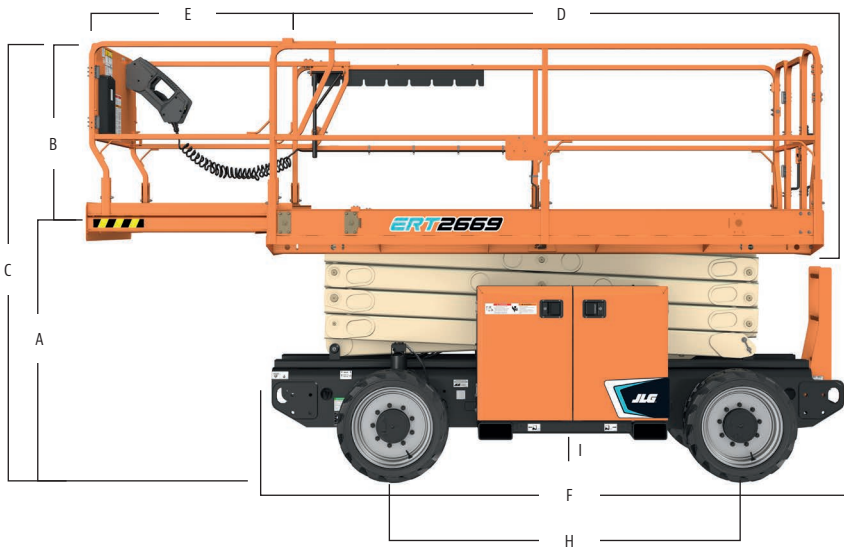

- Platform Height - Elevated

ERT2669	26'2"	7.98 m
ERT3369	32'8"	9.96 m
ERT4069	40'3"	12.3 m
ERT4769	47'	14.3 m

- A. Platform Height - Lowered

ERT2669	4'3"	1.3 m
ERT3369	4'9"	1.46 m
ERT4069	4'10"	1.46 m
ERT4769	5'4"	1.62 m

- B. Platform Railing Height*

44.7"	1.14 m
-------	--------

- C. Overall Height

ERT2669	44.7"	1.14 m
ERT3369	96.7"	2.46 m
ERT4069	102.9"	2.61 m
ERT4769	103"	2.62 m

- D. Platform Dimensions

ERT4769	109.1"	2.77 m
	130.5" x 63"	3.3 x 1.6 m

- E. Platform Extension

42"	1.07 m
-----	--------

- F. Overall Machine Length

139"	3.53 m
------	--------

- G. Overall Machine Width

69.3"	1.76 m
-------	--------

- H. Wheelbase

81.3"	2.07 m
-------	--------

- I. Ground Clearance

10.1"	25.7 cm
-------	---------

* Fold Down Rails

Preliminary version



IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification.



JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Tel.: +31 (0)23 565 5665
www.jlg.com

An Oshkosh Corporation Company